

SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

UR Chip type, High Reliability Series

LEI Low ESR **LL** Long Life **S** Solvent Proof
WV ≤ 100V






- Chip type, high temperature range, for 125°C use
- Lower ESR than UC series
- Designed for surface mounting on high density PC board
- Applicable to automatic insertion machine using carrier tape
- Application to automotive system
- Complied to the RoHS directive

UC → **UR**
Low ESR.



Item	Characteristics	
Operating temperature range	-40 ~ +125°C	
Leakage current max.	WV ≤ 100 I = 0.01CV or 3μA whichever is greater (after 2 minutes)	WV ≥ 160 I = 0.04CV + 100μA (after 2 minutes)
	±20% at 120Hz, 20°C	
Dissipation factor max. (at 120Hz, 20°C)	WV	10 16 25 35 50 ~ 80 100 160 ~ 250 400
	tanδ	0.22 0.19 0.16 0.14 0.12 0.10 0.20 0.24
Temperature characteristics (Impedance ratio at 120Hz)	WV	10 16 25 35 ~ 100 160 ~ 250 400
	Z-25°C/Z+20°C	3 2 2 2 3 6
	Z-40°C/Z+20°C	4 3 3 3 6 10
Load life (after application of the rated voltage for 5000 hours at 125°C)	Leakage current	Less than specified value
	Capacitance change	Within ±30% of initial value
	tanδ	Less than 300% of specified value
	∅D	~ 80V 100V 160V ~
	∅D = 4, 5, 6.3	1000 hours - -
	8 × 6.2	3000 hours - -
Shelf life (at 125°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384-4	
	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 10 seconds.	
Resistance to soldering heat	Leakage current	Less than specified value
	Capacitance change	Within ±10% of initial value
	tanδ	Less than specified value

● DRAWING - Series code of UR is "R"

Unit : mm

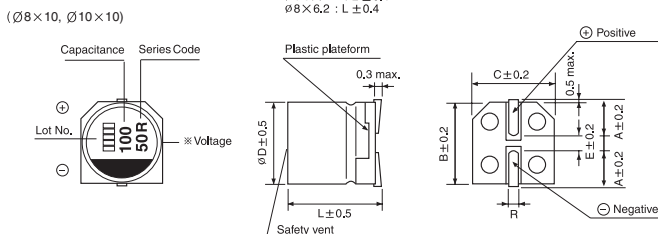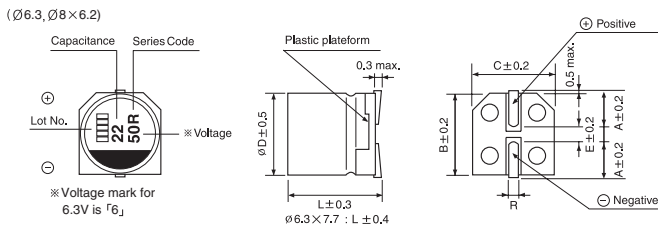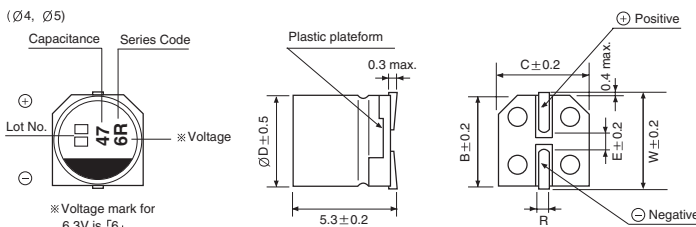

∅D × L	W	A	B	C	E	R
4 × 5.3	4.8		4.3	4.3	1.0	0.5 ~ 0.8
5 × 5.3	5.8		5.3	5.3	1.4	0.5 ~ 0.8
6.3 × 5.3		2.4	6.6	6.6	2.2	0.5 ~ 0.8
6.3 × 5.8		2.4	6.6	6.6	2.2	0.5 ~ 0.8
6.3 × 7.7		2.4	6.6	6.6	2.2	0.5 ~ 0.8
8 × 6.2		3.3	8.3	8.3	2.3	0.5 ~ 0.8
8 × 10		2.9	8.3	8.3	3.1	0.8 ~ 1.1
10 × 10		3.2	10.3	10.3	4.5	0.8 ~ 1.1
12.5 × 13.5		4.6	12.8	12.8	4.5	1.3 ~ 1.6

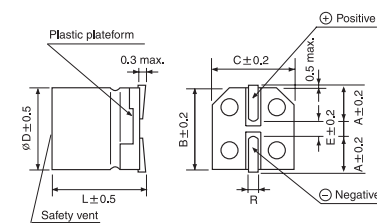

SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

UR series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF \diagdown WV	10			16			25			35		
4.7										4×5.3	7.00	12
10				4×5.3	7.00	12	5×5.3	3.30	23	6.3×5.8	1.60	69
22	5×5.3	3.30	23	5×5.3	3.30	23	6.3×5.3	2.00	40	6.3×5.8	1.60	69
33	5×5.3	3.30	23	6.3×5.3	2.00	40	6.3×5.8	1.60	69	6.3×7.7	1.60	75
47	6.3×5.3	2.00	40	6.3×5.8	1.60	69	6.3×7.7	0.90	110	6.3×7.7	0.90	190
							8×6.2	0.90	110	8×10	0.30	264
100	8×6.2	0.90	110	8×6.2	0.90	110	6.3×7.7	0.90	150	8×10	0.30	264
							8×10	0.30	264			
220	8×10	0.30	264	8×10	0.30	355	8×10	0.30	355	8×10	0.30	350
										10×10	0.20	400
330	8×10	0.30	355	10×10	0.20	400	10×10	0.20	400	12.5×13.5	0.14	750
							12.5×13.5	0.14	750			
470	10×10	0.20	400	12.5×13.5	0.14	750	12.5×13.5	0.14	750			
680										12.5×13.5	0.10	1000
820							12.5×13.5	0.10	800			
1000							12.5×13.5	0.06	1700			

μF \diagdown WV	50			63			80			100		
10	6.3×5.8	2.80	51	6.3×5.8	2.50	55	8×10	1.20	70	8×10	1.60	70
				8×6.2	2.00	60						
22	6.3×7.7	2.20	70	8×10	1.00	70	10×10	0.55	115	10×10	1.60	95
	8×6.2	1.60	83									
33	8×10	0.70	192	10×10	0.55	115	10×10	0.55	115	10×10	0.80	115
47	10×10	0.50	330	10×10	0.55	115	10×10	0.55	115	12.5×13.5	0.33	450
							12.5×13.5	0.33	450			
100	10×10	0.50	330	10×10	0.55	115	12.5×13.5	0.33	450	12.5×13.5	0.33	450
				12.5×13.5	0.33	450						
220	12.5×13.5	0.23	550	12.5×13.5	0.33	450						
330	12.5×13.5	0.23	550	12.5×13.5	0.33	450						
470	12.5×13.5	0.23	550									

↑ Ripple current (mA rms) at 125°C, 100kHz
 ↑ ESR (Ω) at 20°C, 100kHz
 ↑ Case size $\varnothing D \times L$ (mm)

μF \diagdown WV	160		200		250		400	
1							10×10	18
2.2							10×10	26
3.3							10×10	37
4.7					12.5×13.5	70	12.5×13.5	70
10	12.5×13.5	100	12.5×13.5	100	12.5×13.5	100		
22	12.5×13.5	120	12.5×13.5	120				

↑ Ripple current (mA rms) at 125°C, 120Hz
 ↑ Case size $\varnothing D \times L$ (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency		120Hz	1kHz	10kHz	100kHz
wv	cap.				
≤ 100	~ 10	0.66	0.86	0.93	1.00
	22 ~	0.93	0.97	1.00	1.00
160 ≤	-	1.00	1.50	1.75	1.80